


 DIN 863 T3
(Style D18)


 0,001 mm /
0,00005 in



 Conversion
mm/in


 Inspection report
with a declaration
of conformity


 RS232


 Additional
technical data:
see appropriate
standard


 Max. 10 N


 30 mm measuring
span


MICROMASTER AC Micrometers for Thread Measurement

Used for pitch diameter inspection. Anvil with adjustable holder for mounting a measuring insert with prismatic faces. Fine screw adjustment and locking device. The spindle has a fixing bore for a cone-shaped measuring insert.



No	mm	in
06030062	0 ÷ 25	0 ÷ 1
06030063	25 ÷ 50	1 ÷ 2
06030064	50 ÷ 75	2 ÷ 3
06030065	75 ÷ 100	3 ÷ 4

Note: Measuring inserts and setting standards must be ordered separately.

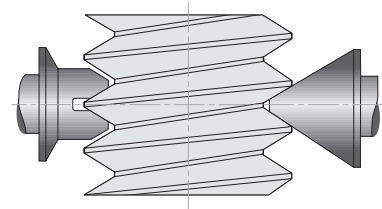


 DIN 863 T3
(Style D 18)
NFE 11-090


 0,5 mm


 Max. 10 N


 0,01 mm

ISOMASTER AC Micrometers for Thread Measurement Models

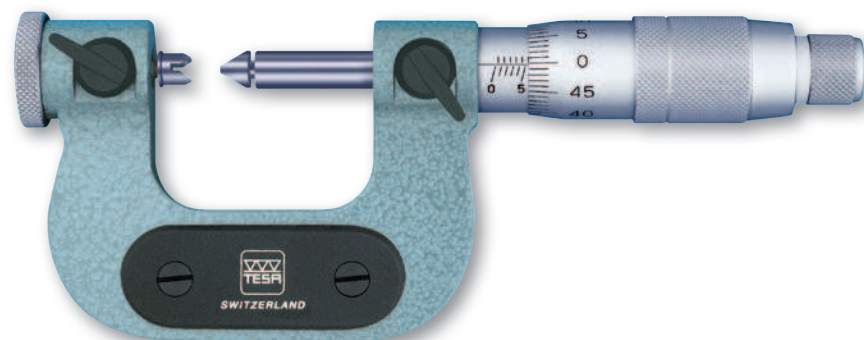

No	mm
00210001	0 ÷ 25
00210002	25 ÷ 50
00210003	50 ÷ 75
00210004	75 ÷ 100

Measuring inserts and setting standards must be ordered separately.

