





-  DIN 863 T3 (Style D16) NFE 11-090
-  Tungsten carbide tipped
-  0,5 mm
-  Max. 10 N
-  8 mm diameter
-  0,01 mm
-  0 ≤ 500 mm: malleable cast iron; 500 ≤ 1000 mm: steel tube with insulating grips. Max. flexure of the frame under a measuring force of 10 N: see the table opposite

ISOMASTER AB with Interchangeable Anvils



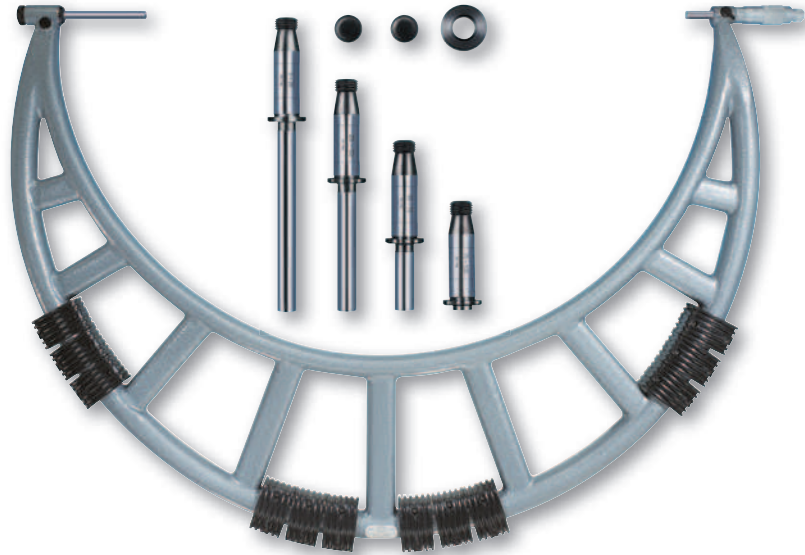

Lightweight, but rugged anvil micrometers. Set No. 00140101 includes 4 interchangeable anvils with increasing length in steps of 25 mm.

Anvils are adjusted and numbered in pairs, thus rendering any correction of the indication unnecessary whenever an anvil is exchanged.



No			
	mm	μm	μm
00111901	0 ÷ 100	6	3
00111902	100 ÷ 200	7	4,5
00111903	200 ÷ 300	8	7
00111904	300 ÷ 400	9	9
00111905	400 ÷ 500	10	9
OPTIONAL ACCESSORIES:			
00140301	Dial gauge element		

Measuring range up to 1500 mm also available upon request.

-  DIN 863 T3 (Style D16) NFE 11-090
-  Tungsten carbide tipped
-  Set includes 2 guard plates for the frame as well as 1 clamping nut
-  8 mm diameter

Interchangeable Anvils for ISOMASTER AB Series

Set of 4 interchangeable anvils with increasing length in steps of 25 mm. The anvils are adjusted and numbered in pairs, thus eliminating the need for resetting the indication when exchanging either of them. Supplied as standard accessories with the AB series micrometers.

No	
00140101	Interchangeable anvils AB

