


 EN ISO 463
Factory standard


 Rotating dial


 Full-metal casing.
Mounting shank and
plunger in hardened
stainless steel


 With or without an-
ti-shock mechanism


 Adjustable tolerance
markers. Thread
M2,5 for measuring
insert


 Measuring insert
with 3,175 mm
Ø ball tip already
mounted


 Inspection report
with declaration of
conformity

Dial Ø 40 mm – Reading 0,01 mm

Precision dial gauges


Model 0141760560 provides excellent value for money.




0141760560



01419047

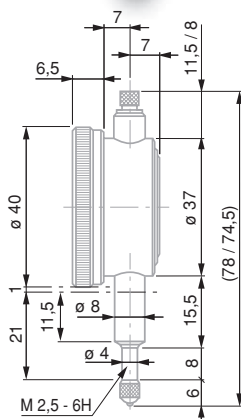

0141760560

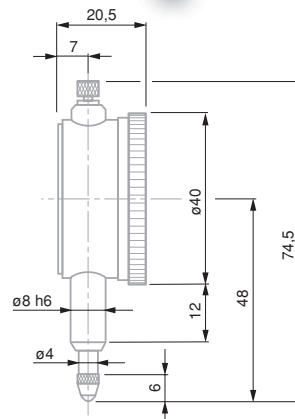

01419047

No	*	=						
0141760560 *	ROCH		3	3,4	0,01	0,5	0 ÷ 25 ÷ 50	–
01419047	ETALON		5	–	0,01	0,5	0 ÷ 25 ÷ 50	●

* With extra reverse numbering in red

Permissible limits of a metrological characteristic (MPE/MPL)

|--|