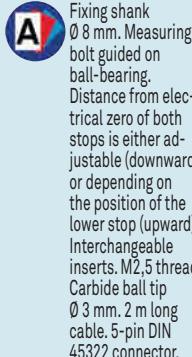




DIN 32876
Part 1


Nickel-plated housing. Stainless steel measuring bolt, hardened. Viton bellows = high-resistance fluoroelastomer

Fixing shank
Ø 8 mm. Measuring
bolt guided on
ball-bearing.
Distance from elec-
trical zero of both
stops is either ad-
justable (downward)
or depending on
the position of the
lower stop (upward).
Interchangeable
inserts. M2,5 thread.
Carbide ball tip
Ø 3 mm. 2 m long
cable. 5-pin DIN
45322 connector.Supply frequency:
13 kHz ($\pm 5\%$) Max.
mechanical fre-
quency** 60 Hz.

0,15 µm/C

20 \pm 0,5°CProtection level IP65
(IEC 60529)

Mobile weight: 8 g

Inspection report
with a declaration of
conformity

Standard Probes, ± 2 mm, 10,3 mm Travel, with Long Retraction Travel

Universal inductive probes for various applications, especially for use with multi-gauging inspection fixtures.

- Long retraction travel to prevent the probe from being damaged.
- Protection level IP65 as per IEC 60529.
- Large choice of accessories: measuring inserts, spring sets, etc.
- LVDT probes compatible with measuring equipment from other suppliers also available on request.




GT 27



GT 271



GT 28

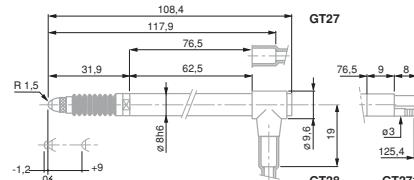GT 27/ 28
GT 271

	No	=		Measuring range, mm	Nominal measuring force*, N	Measuring bolt retraction	Sealing bellows
03230027	GT 27			± 2	0,63	Mechanical	Viton
03230073	GT 271			± 2	0,63	Mechanical / vacuum	Viton
03230026	GT 28			± 2	0,63	Mechanical / vacuum	Viton

						Cable output	Data Sheet No.
GT 27	10,3	$0,2 + 3 \cdot L^3$	0,05	0,05	-2,2 to 0,1 (factory setting -1,2)	Axial	03200251
GT 271	10,3	$0,2 + 3 \cdot L^3$	0,05	0,05	-2,2 to 0,1 (factory setting -1,2)	Axial	03200436
GT 28	10,3	$0,2 + 3 \cdot L^3$	0,05	0,05	-2,2 to 0,1 (factory setting -1,2)	Radial	03200252



* Electrical zero (N) $\pm 25\%$ deviation limit. Valid in vertical mounting position, measuring bolt lowered and in static measuring.

** For an amplitude of 10 % to the last value of the measuring range.

*** Distance from electrical zero

