


## ANGLE PROTRACTORS

### Angle Protractor with Digital Display

Measuring ranges 1x 360°, 2x 180°, 4x 90°  
 Large decimal or sexagesimal display  
 2 measuring directions  
 Fine setting with adjustment screw  
 Locking system  
 Scale L = 200 mm (300 or 500 mm available as options)  
 RS232 data output

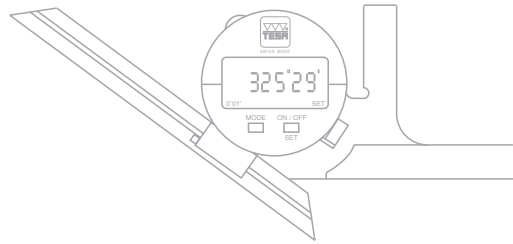

- Measuring ranges:  
1 x 360°, 2 x 180°,  
4 x 90°
- LCD, 5 digits + sign
- 0,01° / 1 minute  
of arc
- 8,5 mm
- Max. perm. error: 4  
minutes of arc
- Stainless steel body,  
hardened
- Maximum rotation  
speed: 1080°/s
- Preset to 0° or 180°
- RS232 opto-coupled
- 1x CR2032 3,0V
- 5000 hours
- IP51 (CEI 529)
- 410 g
- Wooden case (ISPM  
15 and NIPM 15)

No	=
00630010	Angle protractor with digital display. Supplied with a scale of L = 200 mm
<i>OPTIONAL ACCESSORIES:</i>	
00660004	Scale 200 mm
00660005	Scale 300 mm
00660006	Scale 500 mm
00660007	Supporting base with 1 flat measuring face and 1 prismatic measuring face
00660008	Square for measuring sharp angles
01961000	Lithium battery, 3V, CR 2032
04761062	Opto-USB cable, duplex, bidirectional communication

