


### MICROMASTER Micrometer with Small Measuring Faces

For measuring grooves, feather grooves, splines and other difficult to reach locations – Small measuring faces specially made to check small precision workpieces.



|                     |                            |         |
|---------------------|----------------------------|---------|
| No                  |                            |         |
|                     | mm                         | in      |
| 06030034            | 0 ÷ 30                     | 0 ÷ 1.2 |
| OPTIONAL ACCESSORY: |                            |         |
| 01961000            | Lithium battery 3V, CR2032 |         |

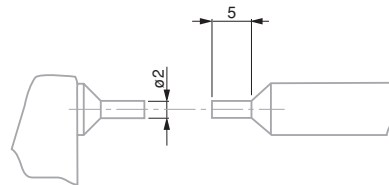


- DIN 863 T3 (Style D3)
- 0,001 mm / 0.00005 in
- Conversion mm/in
- Fixed measuring faces: tungsten carbide.
- Degree of protection (IEC 60529): IP54 or IP40 with use of the digital output
- Measuring range 0 to 100: with a SCS calibration certificate.
- RS232 interface, opto-coupled.
- For additional technical data: see standard.
- Max. 10 N

### TESAMASTER AD Micrometer with Small Measuring Faces



|          |        |
|----------|--------|
| No       |        |
|          | mm     |
| 00311301 | 0 ÷ 25 |

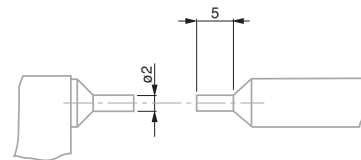

- DIN 863 T3 (Style D3) NFE 11-090
- Scale division 0,1 mm
- Fixed measuring faces: tungsten carbide
- Inspection report with a declaration of conformity
- Max. 10 N
- Vernier reading to 0,001 mm