

**SLIMLINE™ TORQUE WRENCHES ADJUSTABLE**



- SLO torque wrench accuracy exceeds all international standards
- Unmistakable signal when set torque is reached
- Traceable calibration certificate supplied to satisfy ISO9000:2000 quality systems
- High quality 72 tooth ratchet allows use in confined spaces
- Fixed head version has a push through square for left and right handed torque tightening
- Moulded grip aids correct hand location and operator comfort

**2 ADJUSTABLE RATCHET - DUAL SCALE**

11034	SLO Steel Knob, 3/8", 1 - 20 N·m, 10 - 180 lbf·in
11037	SLO Steel Knob, 1/2", 1 - 20 N·m, 10 - 180 lbf·in
11123	SLO Plastic Knob, 1/4", 4 - 20 N·m, 40 - 180 lbf·in
11087	SLO Plastic Knob, 3/8", 4 - 20 N·m, 40 - 180 lbf·in

**2 ADJUSTABLE - FIXED HEAD - DUAL SCALE**

11035	SLO Steel Knob, 3/8" Fixed Head, 1 - 20 N·m, 10 - 180 lbf·in
11125	SLO Plastic Knob, 3/8" Fixed Head, 4 - 20 N·m, 40 - 180 lbf·in

Torque Handle versions are available for both 16mm spigot and 9 x 12mm fittings.

**2 TORQUE HANDLE ADJUSTABLE - DUAL SCALE**

11036	SLO 16mm spigot, 1 - 20 N·m, 10 - 180 lbf·in
11126	SLO 16mm spigot, 4 - 20 N·m, 40 - 180 lbf·in
11122	SLO 9 x 12mm female, 4 - 20 N·m, 40 - 180 lbf·in


Production 'P' type versions are designed to discourage unauthorised alteration. They have no scale and so must be set against a torque testing device such as Norbar's TruCheck™ - see page 48.

**2 PRODUCTION 'P' TYPE (Must be set using a Torque Tester, see pages 48-51)**

11089	SLO 3/8" Fixed Head, 1 - 20 N·m, 10 - 180 lbf·in
11085	SLO 1/2", 1 - 20 N·m, 10 - 180 lbf·in
11086	SLO 3/8", 1 - 20 N·m, 10 - 180 lbf·in
11090	SLO 16mm spigot, 1 - 20 N·m, 10 - 180 lbf·in
11088	SLO 9 x 12mm female, 1 - 20 N·m, 10 - 180 lbf·in
SQ2222	Pre-set, etch and certify (Allow 3 days delivery for this service)



**PROFESSIONAL TORQUE WRENCHES MODEL 5**

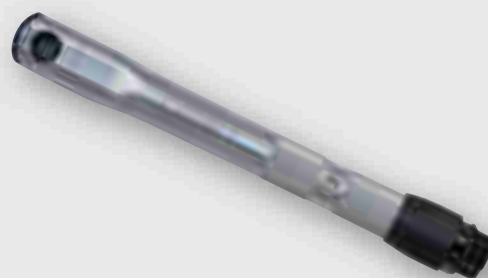


The Model 5 is a unique torque wrench that offers the convenience of interchangeable 1/4" hexagon bits. (ISO 1173:1988 Form C drive bits).

- Accuracy exceeds the requirements of ISO6789:2003
- Traceable calibration certificate supplied, to satisfy ISO9000:2000 quality systems
- Non length dependent. The Model 5 remains accurate regardless of hand position
- Supplied in a storage case. The case allows space for the storage of additional drive bits, and optional stepless ratchet

**2 ADJUSTABLE**

13001	Pro 5, 1/4" female hex, 1 - 5 N·m
13002	Pro 5, 1/4" female hex, 10 - 50 lbf·in
13003	Pro 5, 1/4" female hex, 10 - 50 kgf·cm

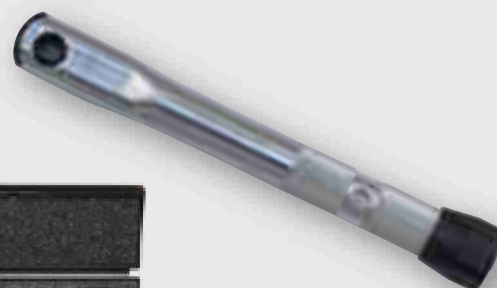

Model 5 'P' Type in storage case

Also available as Production 'P' Types, preventing unauthorised alteration of torque setting. No external calibration equipment is required to set the Model 5 'P' Type.

**2 PRODUCTION 'P' TYPE**

13004	Pro 5, 1/4" female hex, 1 - 5 N·m
13005	Pro 5, 1/4" female hex, 10 - 50 lbf·in
13006	Pro 5, 1/4" female hex, 10 - 50 kgf·cm

**8 MODEL 5 ACCESSORY**

13122	Stepless Ratchet 1/4" Female hex
-------	----------------------------------

**8 MODEL 5 SPARES**

28900	1/4" Hex 1/4" male square drive
-------	---------------------------------