


# 733/10

# Open ring insert tools

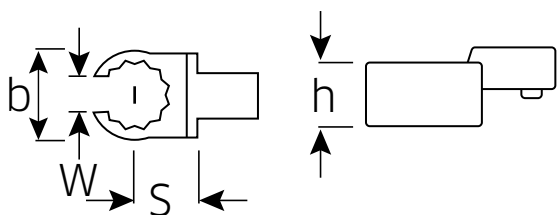

Code	mm	mm	b mm	h mm	W mm	S mm	g
<b>58 23 10 10</b>	<b>10</b>	<b>9x12</b>	21.5	11	7.1	17.5	57
<b>58 23 10 11</b>	<b>11</b>	<b>9x12</b>	22.5	11	8.6	17.5	55
<b>58 23 10 12</b>	<b>12</b>	<b>9x12</b>	24.5	12	9	17.5	59
<b>58 23 10 13</b>	<b>13</b>	<b>9x12</b>	26	12	10	17.5	55
<b>58 23 10 14</b>	<b>14</b>	<b>9x12</b>	27	13	11	17.5	60
<b>58 23 10 16</b>	<b>16</b>	<b>9x12</b>	30.5	13	13	17.5	65
<b>58 23 10 17</b>	<b>17</b>	<b>9x12</b>	31.5	13	14	17.5	64
<b>58 23 10 18</b>	<b>18</b>	<b>9x12</b>	33	15	14.8	17.5	74
<b>58 23 10 19</b>	<b>19</b>	<b>9x12</b>	34	15	15.8	17.5	80
<b>58 23 10 21</b>	<b>21</b>	<b>9x12</b>	38.5	15	16.2	20*	88
<b>58 23 10 22</b>	<b>22</b>	<b>9x12</b>	39.5	15	17	20*	92
<b>58 23 10 24</b>	<b>24</b>	<b>9x12</b>	40	15	18	20*	75

\* Caution! Modified settings on torque wrench (refer to note on page 189)

# 733a/10

# Open ring insert tools



Code	"	mm	b mm	h mm	W mm	S mm	g
<b>58 63 10 24</b>	<b>3/8</b>	<b>9x12</b>	21.5	11	7.1	17.5	55
<b>58 63 10 28</b>	<b>7/16</b>	<b>9x12</b>	22.5	11	8.6	17.5	56
<b>58 63 10 32</b>	<b>1/2</b>	<b>9x12</b>	26	12	9.5	17.5	58
<b>58 63 10 34</b>	<b>9/16</b>	<b>9x12</b>	27.5	13	11	17.5	59
<b>58 63 10 36</b>	<b>5/8</b>	<b>9x12</b>	30.5	13	12.7	17.5	61
<b>58 63 10 38</b>	<b>11/16</b>	<b>9x12</b>	33	15	14	17.5	48
<b>58 63 10 40</b>	<b>3/4</b>	<b>9x12</b>	34	15	15.8	17.5	76