

PROFESSIONAL TORQUE WRENCHES MODELS 650 - 1500 'P' TYPE



2 RATCHET PRODUCTION 'P' TYPE (Must be set using a Torque Tester, see pages 42-45)

14039	Pro 650, 3/4", 130 - 650 N·m, 100 - 480 lbf·ft
14017	Pro 800, 3/4", 200 - 800 N·m, 150 - 600 lbf·ft
14018	Pro 800, 1", 200 - 800 N·m, 150 - 600 lbf·ft
14007	Pro 1000, 3/4", 300 - 1000 N·m, 220 - 750 lbf·ft
14008	Pro 1000, 1", 300 - 1000 N·m, 220 - 750 lbf·ft
14009	Pro 1500, 3/4", 500 - 1500 N·m, 370 - 1100 lbf·ft
14010	Pro 1500, 1", 500 - 1500 N·m, 370 - 1100 lbf·ft

SQ2222 Pre-set, etch and certify (Allow 3 days delivery for this service)



8 MODELS 650-1500 ACCESSORY

14142 Extension Handle (included with Models 800-1500 as standard)



2 TORQUE HANDLES PRODUCTION 'P' TYPE (Must be set using a Torque Tester, see pages 42-45)

14042 Pro 650, 22mm spigot, 130 - 650 N·m, 100 - 480 lbf·ft

SQ2222 Pre-set, etch and certify (Allow 3 days delivery for this service)



2 FEMALE TORQUE HANDLES PRODUCTION 'P' TYPE (Must be set using a Torque Tester, see pages 42-45)

14043 Pro 650, 14 x 18mm, 130 - 650 N·m, 100 - 480 lbf·ft

SQ2222 Pre-set, etch and certify (Allow 3 days delivery for this service)

SLIMLINE™ TORQUE WRENCHES ADJUSTABLE



- SLO torque wrench accuracy exceeds all international standards
- Unmistakable signal when set torque is reached
- Traceable calibration certificate supplied to satisfy ISO9000:2000 quality systems
- High quality 72 tooth ratchet allows use in confined spaces
- Fixed head version has a push through square for left and right handed torque tightening
- Moulded grip aids correct hand location and operator comfort


2 ADJUSTABLE RATCHET - DUAL SCALE

11034	SLO Steel Knob, 3/8", 1 - 20 N·m, 10 - 180 lbf·in
11037	SLO Steel Knob, 1/4", 1 - 20 N·m, 10 - 180 lbf·in
11123	SLO Plastic Knob, 1/4", 4 - 20 N·m, 40 - 180 lbf·in
11087	SLO Plastic Knob, 3/8", 4 - 20 N·m, 40 - 180 lbf·in



2 ADJUSTABLE - FIXED HEAD - DUAL SCALE

11035	SLO Steel Knob, 3/8" Fixed Head, 1 - 20 N·m, 10 - 180 lbf·in
11125	SLO Plastic Knob, 3/8" Fixed Head, 4 - 20 N·m, 40 - 180 lbf·in

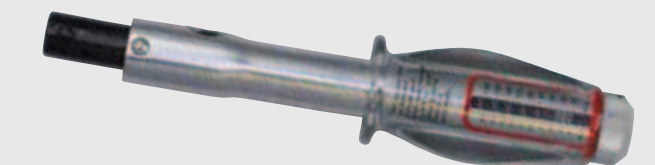

Torque Handle versions are available for both 16mm spigot and 9 x 12mm fittings.

2 TORQUE HANDLE ADJUSTABLE - DUAL SCALE

11036	SLO 16mm spigot, 1 - 20 N·m, 10 - 180 lbf·in
11126	SLO 16mm spigot, 4 - 20 N·m, 40 - 180 lbf·in
11122	SLO 9 x 12mm female, 4 - 20 N·m, 40 - 180 lbf·in