

ETALON 532 Internal Micrometer

This micrometer is designed for measurements with 2-point contact.

Extensions with built-in gauge rods can be used to increase the measuring range – Stiff screw coupling.



- Factory standard
- 15 mm
- 0,01 mm
- Spheric (R = 15 mm)
- 29 mm
- 0,5 mm
- Tungsten carbide tipped
- Reference gauge rods
- Wooden case


| | | | | | | | |
|-----------|--|----|-----------|-----------|-----------|-----------|-----------|
| Full set: | | | 072109101 | 072109107 | 072109108 | 072109117 | 072109128 |
| | | mm | 50 ÷ 170 | 50 ÷ 290 | 50 ÷ 530 | 50 ÷ 1010 | 50 ÷ 1510 |

COMPOSED BY:

| | | mm | mm | µm | | | | | |
|-----------|-----------------------|---------|-----|-----|---|---|---|---|---|
| 072103576 | Micrometrical element | 50 ÷ 65 | | 3 | • | • | • | • | • |
| 072103585 | Extention | | 15 | 1,5 | • | • | • | • | • |
| 072105462 | Extention | | 30 | 1,5 | • | • | • | • | • |
| 072109030 | Extention | | 60 | 2 | • | • | • | • | • |
| 072103586 | Extention | | 120 | 2 | | • | • | • | • |
| 072109055 | Extention | | 240 | 3 | | | • | • | • |
| 072109066 | Extention | | 480 | 3,5 | | | | • | • |
| 072109089 | Extention | | 500 | 3,5 | | | | | • |

ROCH Metric Periphery Tapes

Steel tapes with a dual graduation for measuring external circumferences and diameters of cylindrical parts on machines and other fittings – Suitable for malleable parts such as plastic tubing – Used for inspecting tanks or boilers – Also designed for checking steel or concrete pipes, rims, tires etc.

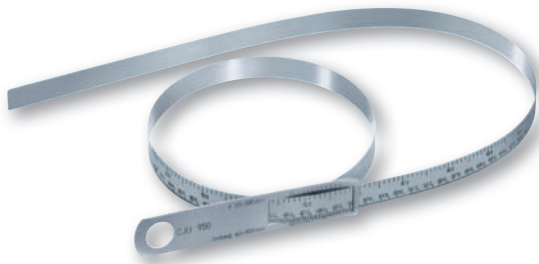

| | Diameter, mm | Circumference, mm | mm |
|------------|--------------|-------------------|------|
| 0951750222 | 20 ÷ 30 | 60 ÷ 950 | 0,15 |
| 0951750223 | 300 ÷ 700 | 940 ÷ 2200 | 0,20 |
| 0951750224 | 700 ÷ 1100 | 2190 ÷ 3460 | 0,20 |
| 0951750225 | 1100 ÷ 1500 | 3450 ÷ 4720 | 0,25 |

- 0,1 mm
- 16 x 0,2 mm type section
- Steel band